
NON WOVEN (surface conditioning) DISCS









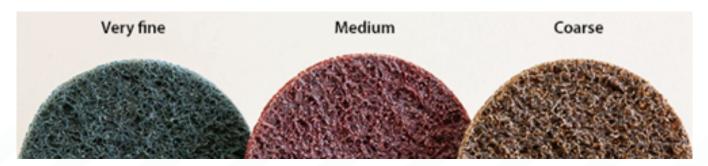

Non-Wover PEGAS	•	Free-hand angle grinder Flap Discs FOR STAINLESS STEEL							
Picture		Performance				Comprehensive performance			
		Significantly improves life, grain retention and fray resistance Cool, noticeably fast cut rate Produced with Italy raw material, stable and extremely high efficiency. Very aggressive and consistent, New resin system for high grain retention Fine finishing primarily on flat surfaces Last 50% – 200% longer than any flap discs on stainless steel,cobalt, chrome, Inconel, titanium and other hard-to-grind materials				Shalding Steel CONTOINER 1 CONTOINER 1 CONTOINER 1 CONTOINER 1 CONTOINER 1 CONTOINER 1 CONTOINER 1			CONTENSER 1 CONTENSER 1
						Shape Symbol		MOQ	
						35501077	T29		
EAN-CODE	Dimension	Grit	pages	page size	Meas	G.w/N.w	Pcs/Ctn		
	mm				CM			T27	T29
PFD115NW	115X22	80-600#	28	25x16	27X27X30	12/11	10/100		
COARSE (80-120#)browne,MEDIUM(150-240#) RED,FINE (320-400#)BLUE,VERY FINE(600#)GREY. SAME PRICE FOR ALL COLOR									

Surface conditioning discs, quick-change

50mm & 75mm diameter surface conditioning discs. Coarse grit works well for touch-up of gel coat surface before adding a layer of clear coat paint. This disc is also available in a fine or medium grit. Choose either the Type S or Type R quick-change attachment. Type R has a threaded spindle, male threads. Sold by the pack.

