

# NYLON (clean & strip) ABRASIVE DISCS

## a) With fiberglass backing

### Product Advantages

- Flexible structure to meet the needs of the workpiece contour and shape
- Open-ended material can be prevented from clogging hot corrosion under high pressure.
- Without corrosive residues on the workpiece surface



### Application




- Removing rust, corrosion spots, dirt, stubborn paint spots, or chemical residues, old coating glue, sealant, gasket residue
- Cleaning welds and blueing material, especially the blueing stainless steel surface after hot-corrosion.
- Cleaning the Filler surface

### Usage Advice


- Mounted wheels will achieve the best grinding performance under 15-20M / S speed, with fine surface, low temperature of the workpiece, and the best balance.



	Black	Blue-Purple
Hardness	Hard	Harder
Service Life	Long	Longer
Sharpness	Sharp	Sharper

Speed-fix Disc		Nylon Material Speed-fix Discs (PEGASUS)				
Picture		Performance		Comprehensive performance		
		<p>Excellent for removal of rust, undercoating, seam-sealers and stone guards, these discs can get into hard to reach areas like wheel wells and under carriage. Ideal for trunk beds and dorr jams. Use to remove oxidation from tire rims and to remove rust from brake assemblies.</p>				
				Material		MOQ
				Aluminum Oxide		
EAN-CODE	Dimension	COLOR	Meas	G.w/N.w	Pcs/Ctn	
	mm		CM			
PSD11522A	115X22.23	PURPLE /BLUE	27X27X30	12/11	10/100	
		BLACK	27X27X30	12/11	10/100	

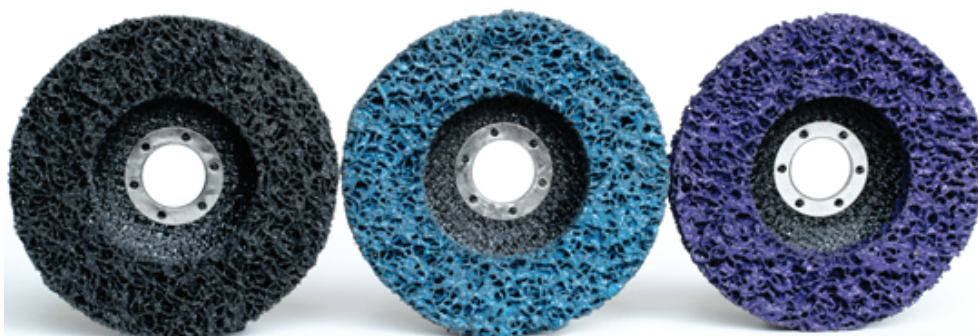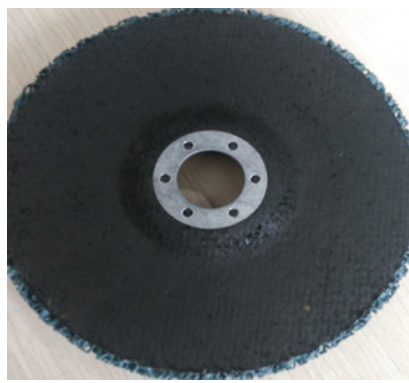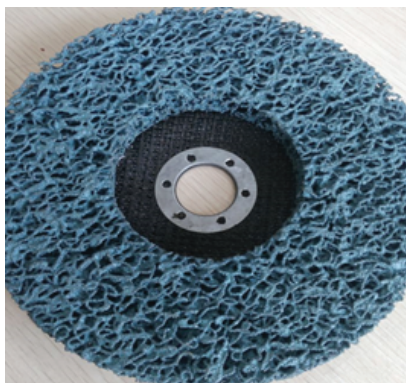

## b) Roller Wheels (clean & strip)

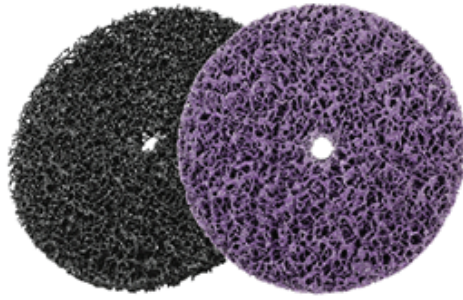

Roller Wheel		Nylon wheels				
Picture		Performance		Comprehensive performance		
		*Aluminum abrasive for conventional circular grinding *Superior durability and efficiency *For flexible shaft, electric and pneumatic tools				
				Material		MOQ
				Aluminum Oxide		
EAN-CODE	Dimension	COLOR	Meas	G.w/N.w	Pcs/Ctn	
	mm		CM			
PRW10012A	100X12X13	PURPLE /BLUE	27X27X30	12/11	10/100	
		BLACK	27X27X30	12/11	10/100	
PRW15012A	150X12X13	PURPLE /BLUE	27X27X30	12/11	10/100	
		BLACK	27X27X30	12/11	10/100	



- Alumina abrasive for conventional circular grinding
- superior durability and efficiency
- For flexible shafts, electric and pneumatic tools

Size		Colour	PCS/BOX	PCS/CTN	M/S	EAN-Code
Dia	Material					
75x6	Aluminum Oxid	Purple Blue Black	12	120	80m/s	PRW7506A
90x6(12)			12	120	80m/s	PRW9006(12)A
100x12			10	100	80m/s	PRW10012A
115x12			10	100	80m/s	PRW11512A
125x12			10	100	80m/s	PRW12512A
150x12			10	100	80m/s	PRW15012A
180x12			6	72	80m/s	PRW18012A
200x12			5	60	80m/s	PRW20012A



Connecting Shaft



- Replace without removing the shank from the machine, which can reduce installation time significantly.
- Connecting Shaft Size:6mm

Size		Colour	PCS/BOX	PCS/CTN	M/S	EAN-Code
Dia	Material					
50x6	Aluminum Oxid	Purple	15	300	80m/s	PRWCS5006A
75x6		Blue Black	10	200	80m/s	PRWCS7506A

c) Nylon non woven (clean & strip) discs, quick-change

Application:

Removing paint and adhesives, cleaning weld seams, removing welding scale and discoloration, surface preparation.(“strip it” discs ). In 50mm & 75mm diameter STRIP IT discs. These discs are available in three grades ,purple---blue—black. Choose either the Type S or Type R quick-change attachment.

